

Lesson 5 GUI application control mode


In this lesson, you will learn how to control the movement of the robotic arm with the GUI application.

5.1 Downloading and installing Python


(1) Log in to the official website by browser: <https://www.python.org/downloads/>



(2) Click the "Download Python 3.8.3" button to download and wait for the download to complete:

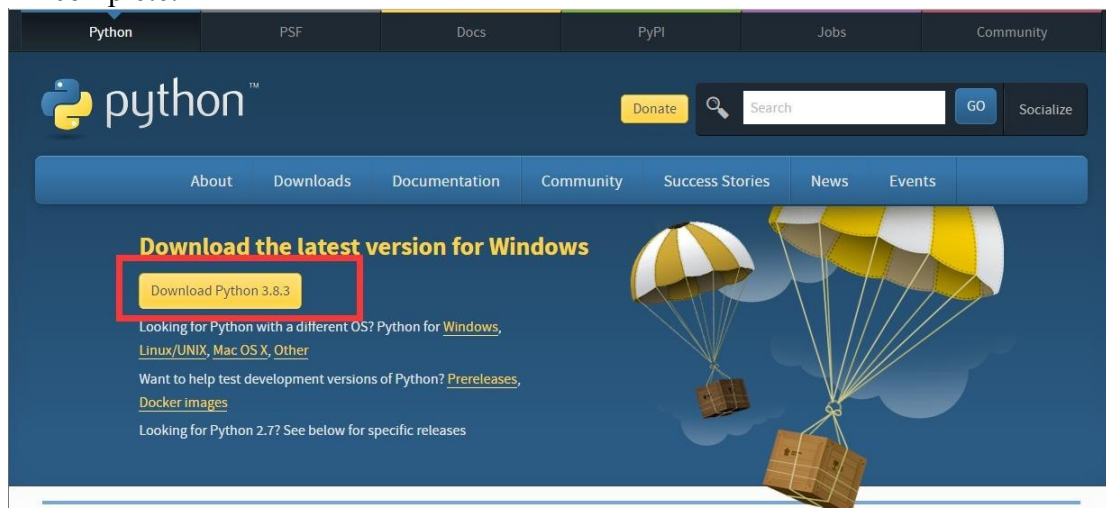


(3) Open the downloaded file, double-click to open it to install:




(4) Select the "Add Python 3.8 to PATH" option:



(5) Then click "Install Now" to install.

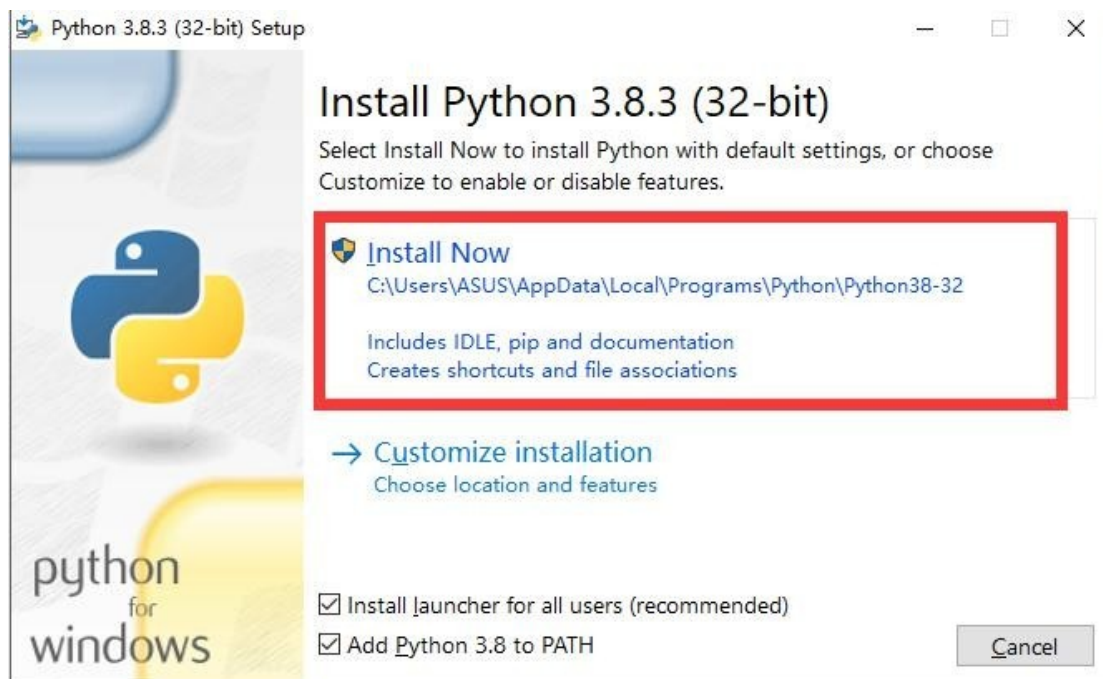

(6) Wait for the Python installation to complete and click "Close" to close.

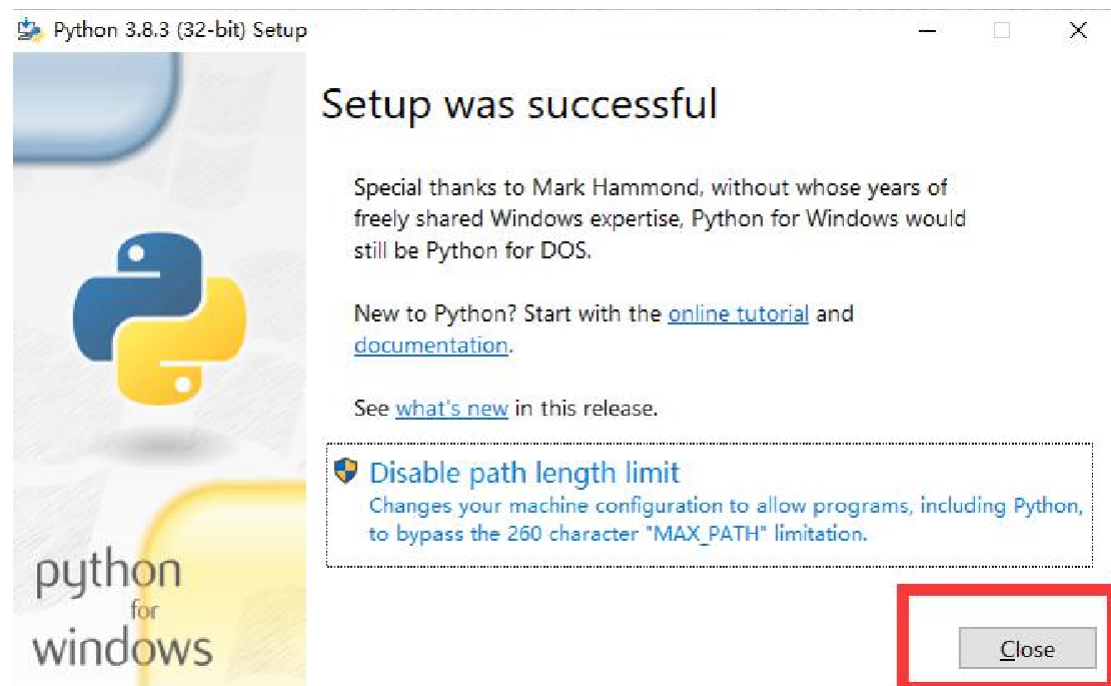


5.2 Installing pySerial


pySerial encapsulates the serial communication module, supporting Linux, Windows, BSD (may support all operating systems that support POSIX), Jython (Java) and IronPython (.NET and Mono). The pyserial module encapsulates access to the serial port. The port number starts from 0 by default. There is no need to know the port name in the program. APIs like `file read` and `write`, `read`, `write` (`readline`, etc. are also supported), support binary transmission, no null elimination, no `cr-lf` conversion, all programs are all done by Python, and do not depend on other packages except the standard library, except `pywin32` (windows), `JavaComm` (Jython). POSIX (Linux, BSD) only depends on the Python standard library.

Before downloading and installing, you can connect the Adept Arm Drive Board development board to your computer.

(1) Press Win+R shortcut key to open CMD under Windows 10:

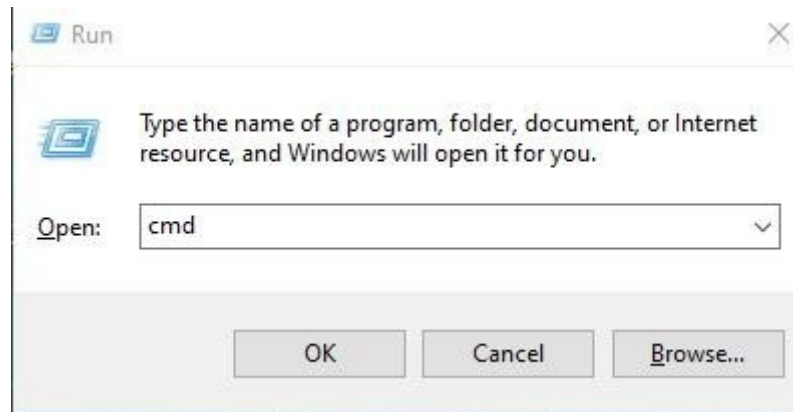

(2) Click "OK":

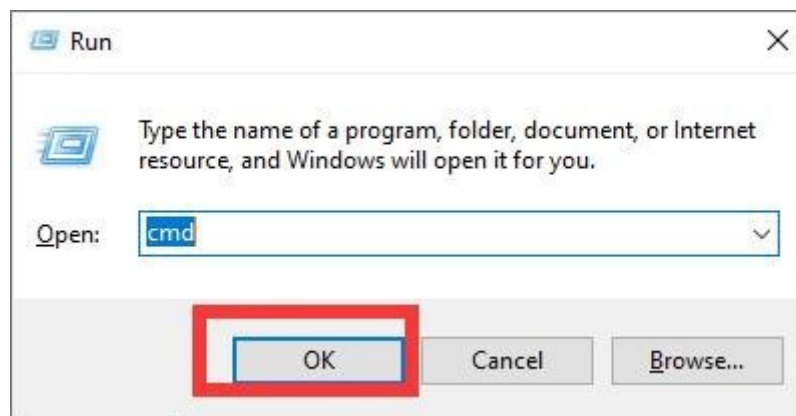

(3) Enter the command in the window:

pip install pyserial

Press the Enter and wait for the installation to complete.


```
C:\Windows\system32\cmd.exe
Microsoft Windows [版本 10.0.18362.836]
(c) 2019 Microsoft Corporation. 保留所有权利。

C:\Users\ASUS>pip install pyserial
Collecting pyserial
  Downloading https://files.pythonhosted.org/packages/0d/e4/2a744dd9e3be04a0c0907414e2a01a7c88bb3915cbe3c8cc06e209f59c30/pyserial-3.4-py2.py3-none-any.whl (193kB)
    |#####| 194kB 3.2kB/s
Installing collected packages: pyserial
Successfully installed pyserial-3.4
WARNING: You are using pip version 19.2.3, however version 20.1.1 is available.
You should consider upgrading via the 'python -m pip install --upgrade pip' command.


C:\Users\ASUS>
```

5.3 Opening the GUI interface


(1) Enter the folder "AadeptRoboticArmforArduinoV3_5" → "01 Software Package" → "block_py" provided by Aadept for users, and find this file: "block_py.ino".

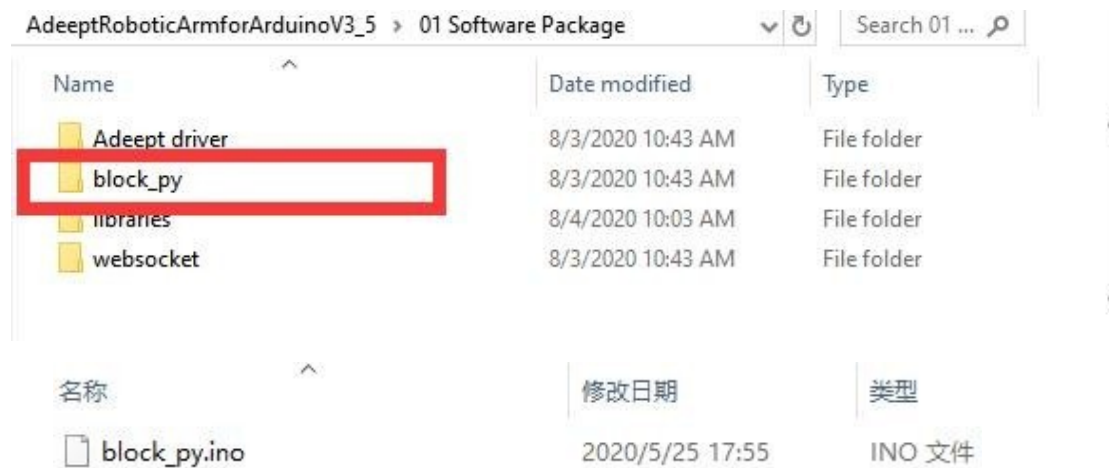


(2) Then right-click the file: "block_py.ino". Select "Open with" → "Choose another app".

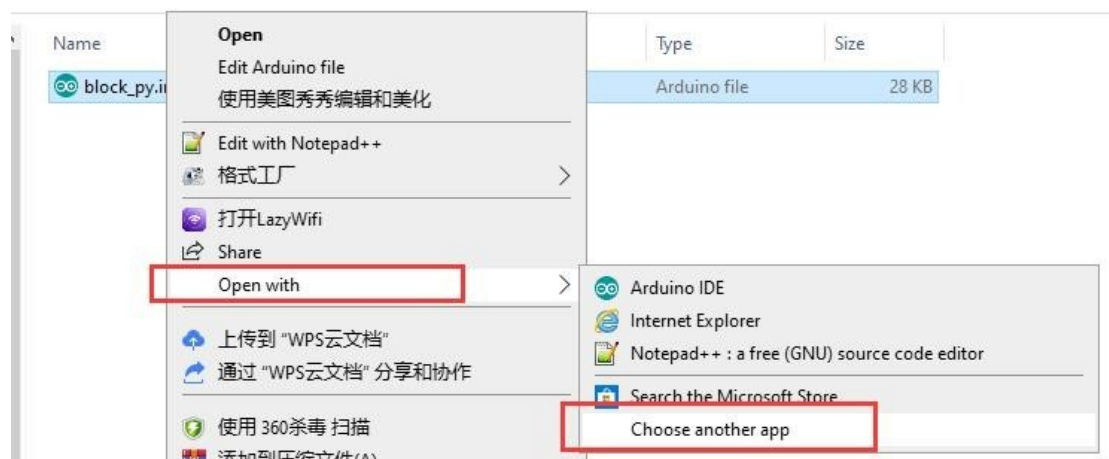


(3) Click "More apps", and then click "OK".

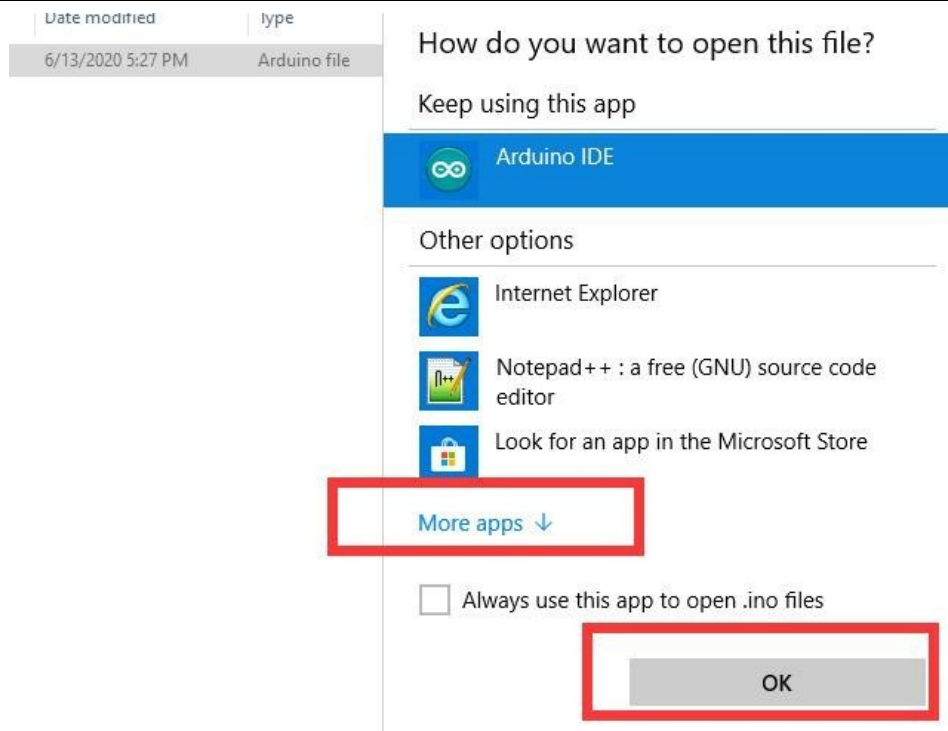

(4) Use the mouse to slide down, click "Look for another app on this PC", and then click "OK".

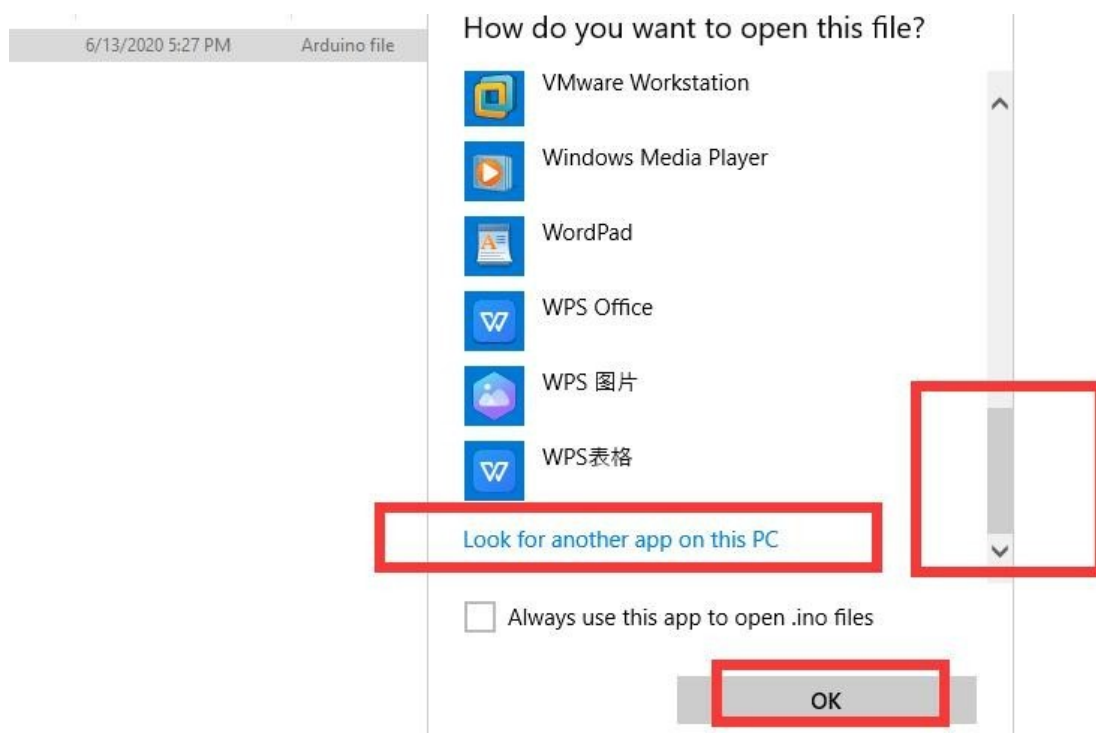


(5) Find the Arduino software on the Desktop or where you installed the Arduino software, select it, and finally click "Open".

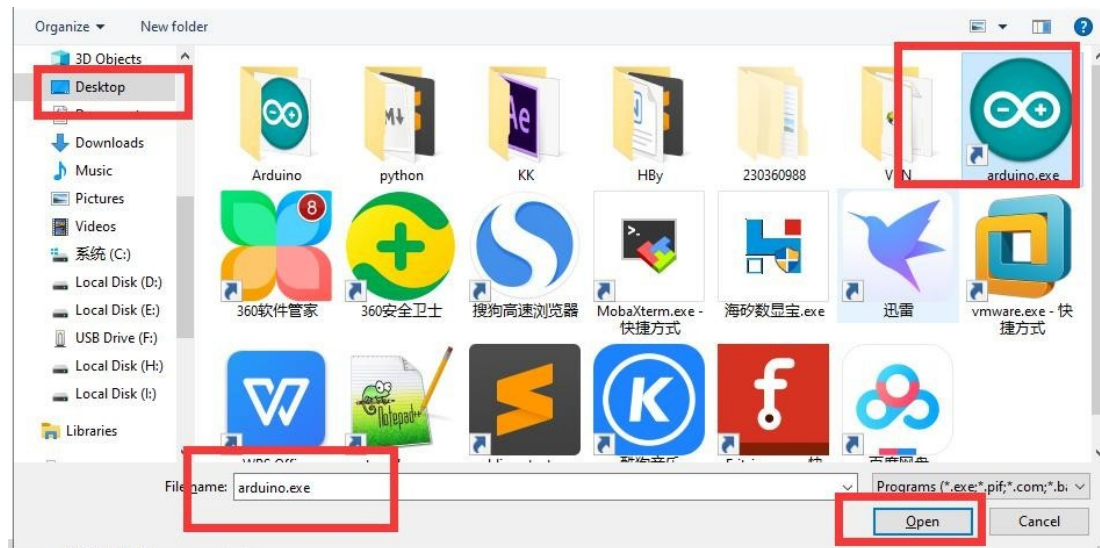


(6) At this time, the Arduino software opens the file "block_py.ino".




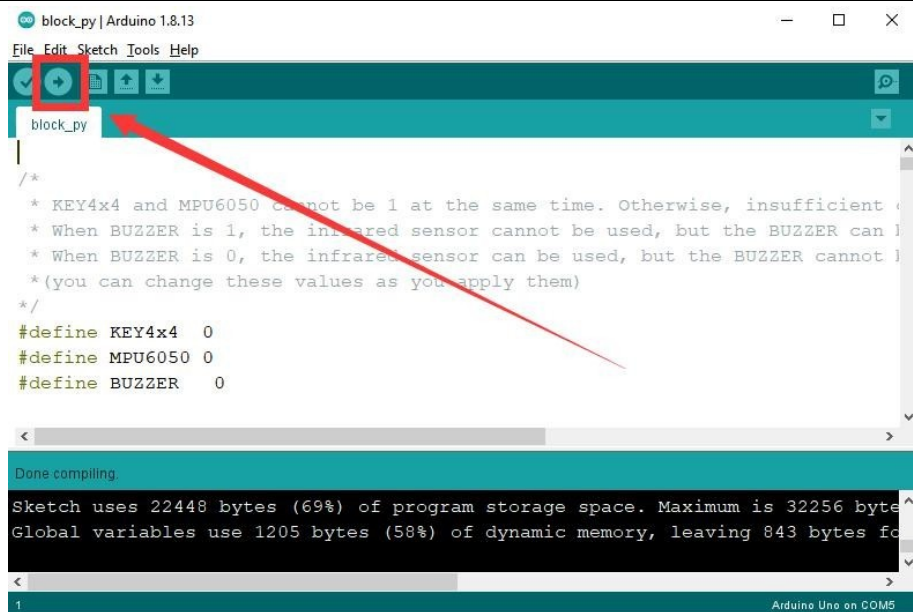
(7) First select the Arduino development board as UNO version with Tools.

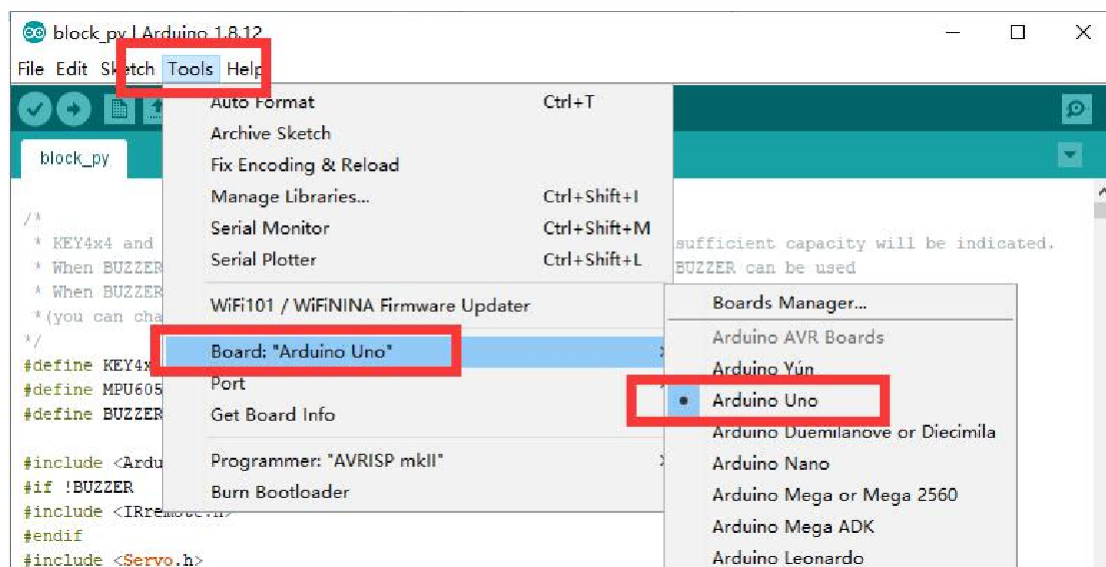


(8) Then continue to use Tools to select the port “Port” of the Adeept Arm Drive Board connected to the computer.

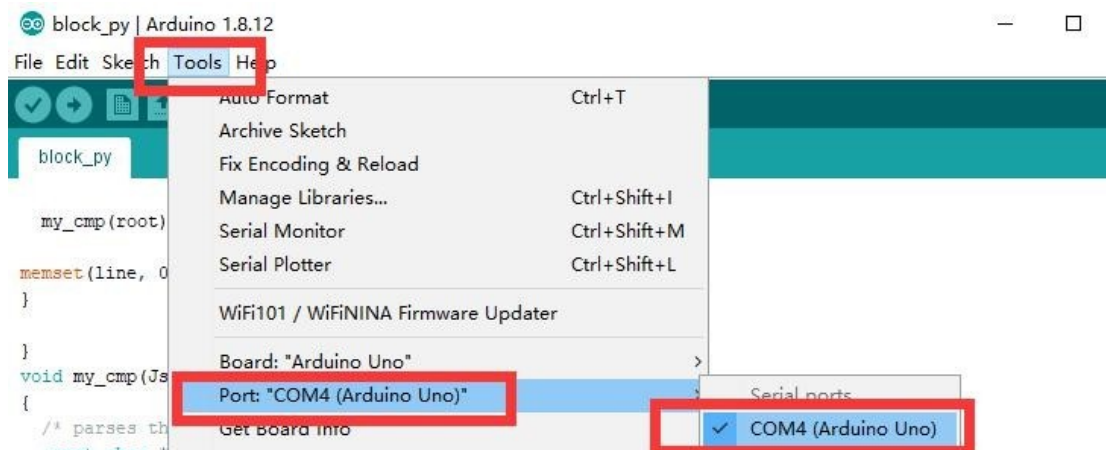


(9) Click the Upload button  to download the code program to the Arduino development board.




(10) Find the folder AdeeptRoboticArmforArduinoV3_5"→"01 Software Package"→"websocket", find this file: "servosGUI.py".

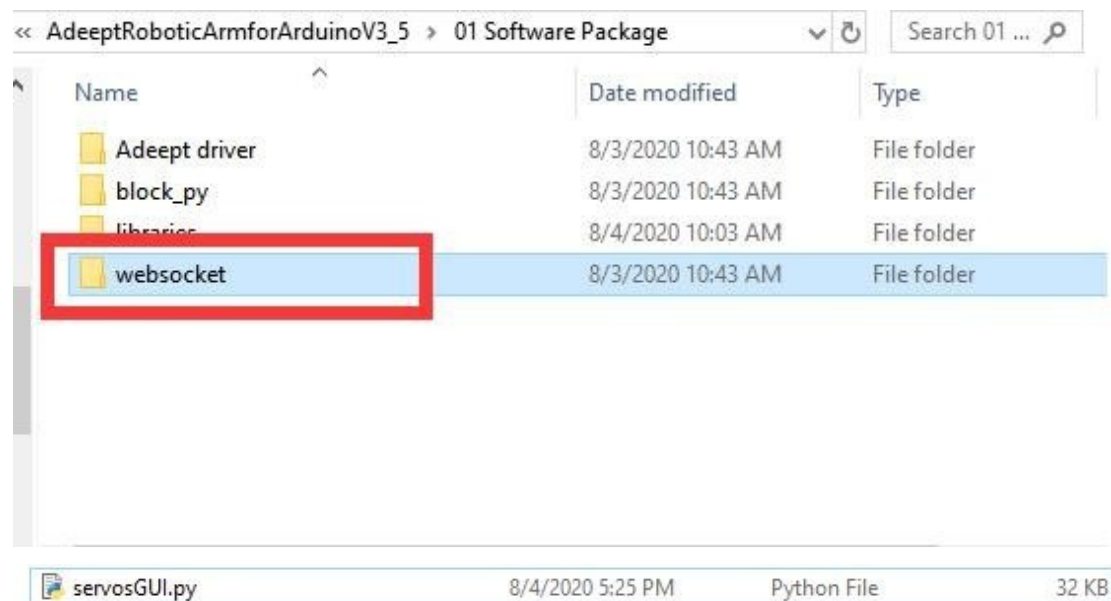

(11) Double-click to open this file: servosGUI.py

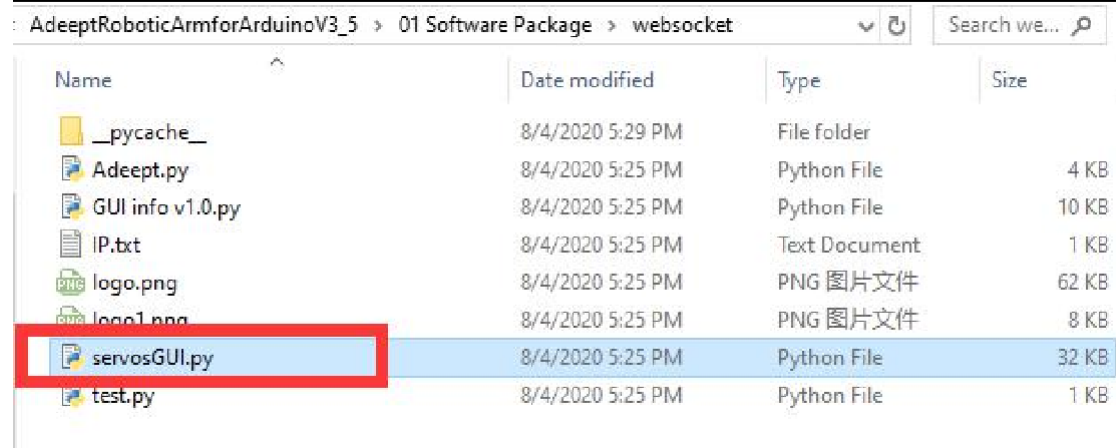


(12) After the GUI is opened, as shown in the figure below, you need to fill in the Port in the Arduino IDE in the Port input field. For example, the Port connected to the Arduino IDE is COM5, then you enter COM5, and then click Connect. After successfully connecting, there will be a prompt message in the upper left corner: "COM5: Success".

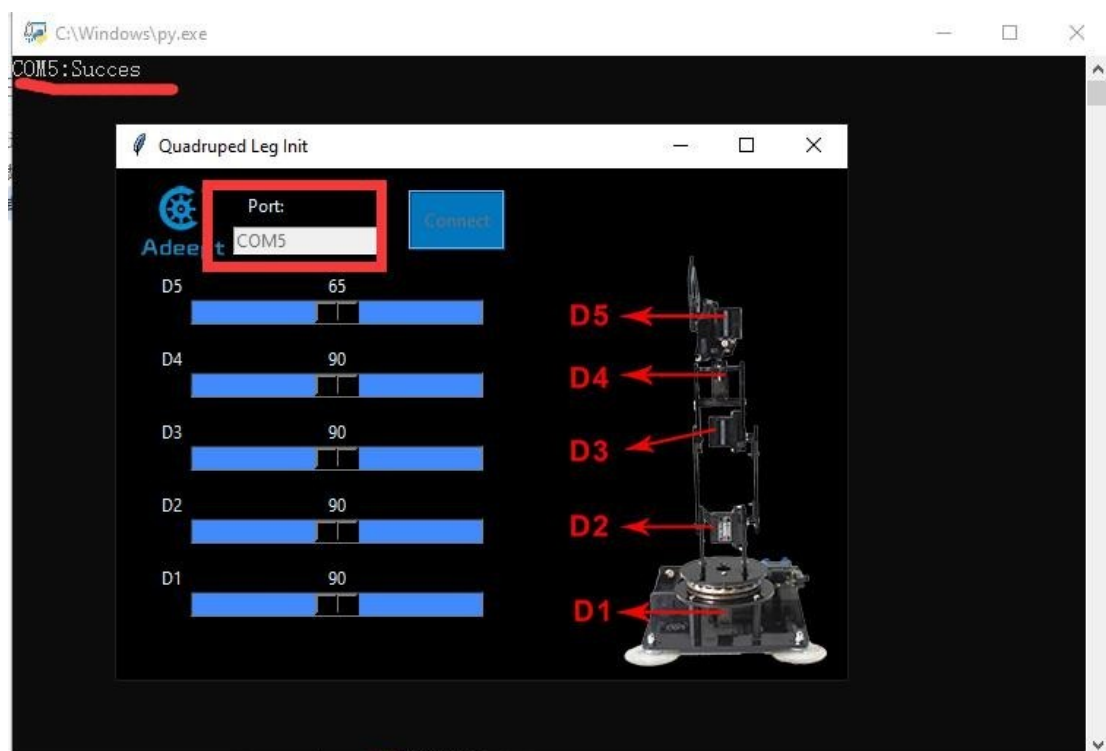

5.4 Controlling the robotic arm with the GUI interface

Note that the arm is still connected to the computer with the USB cable.

1. In the opened GUI interface, the left area is to control the movement of the servo D1~D5, and the right area is the structure diagram of the servo of the robotic arm.

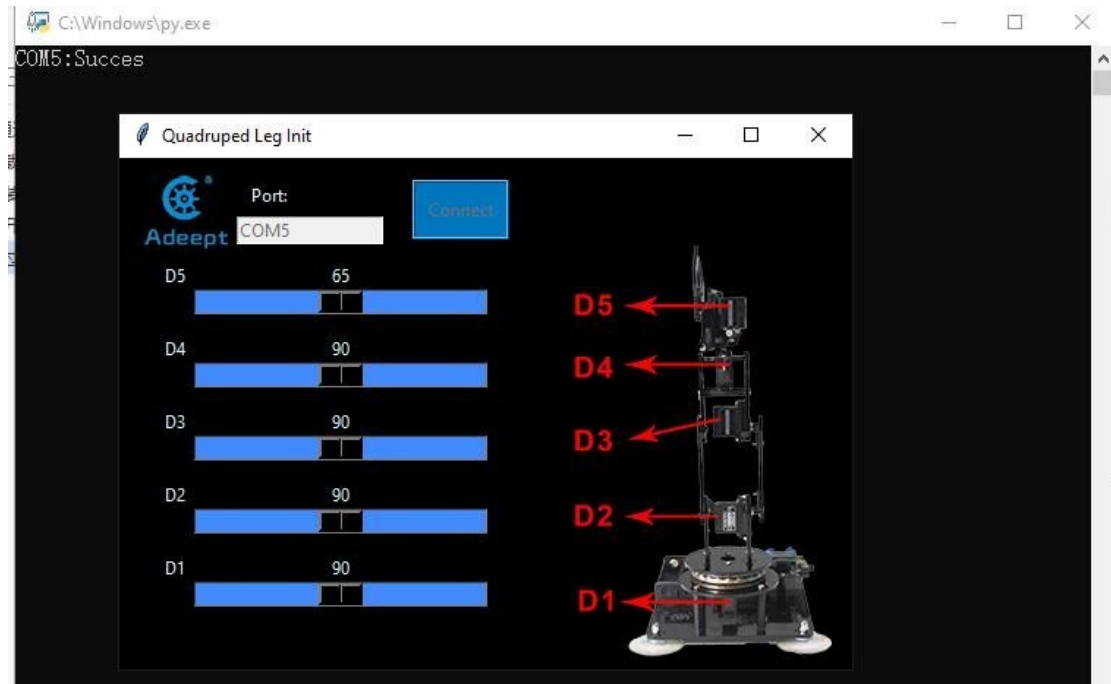

2. When you need to control the robotic arm, you can slide the slider corresponding to the servo in the left area to control the movement of the robotic arm. When a certain position is slipped, a data will be displayed on the slider, this data represents the angle.

